



FITTING INSTRUCTIONS

Door 1

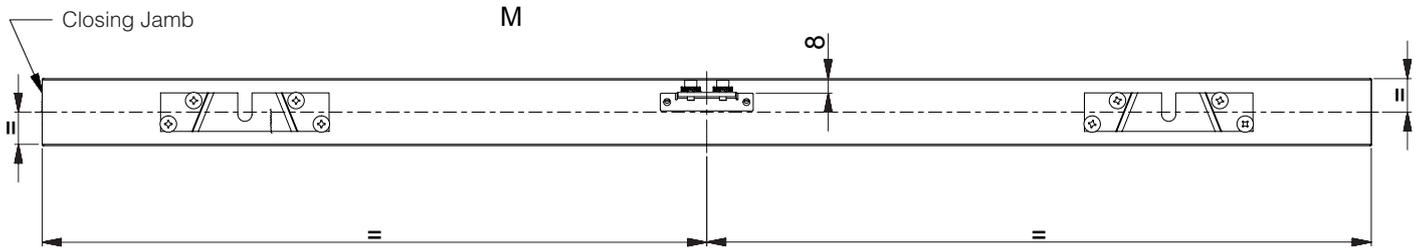


Door 2

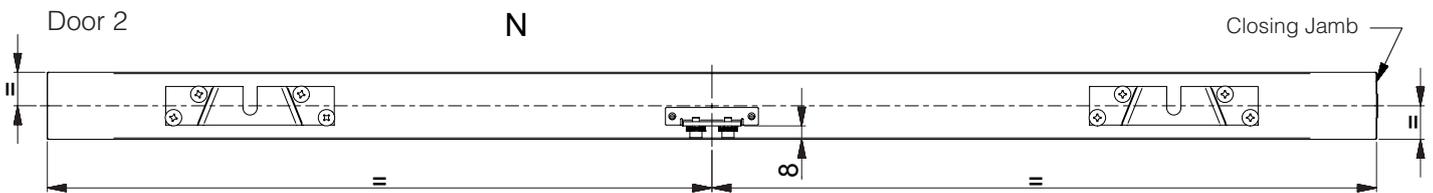

Mark the fixing positions of the centre cable brackets to the top of each of the two doors as shown above. Please note the respective positions of each bracket to the edges of each door. Once marked remove the brackets. Do not fix into position at this stage.

IMPORTANT Install all of the fittings shown below **BEFORE** installing the top tracks into the pocket door frames.

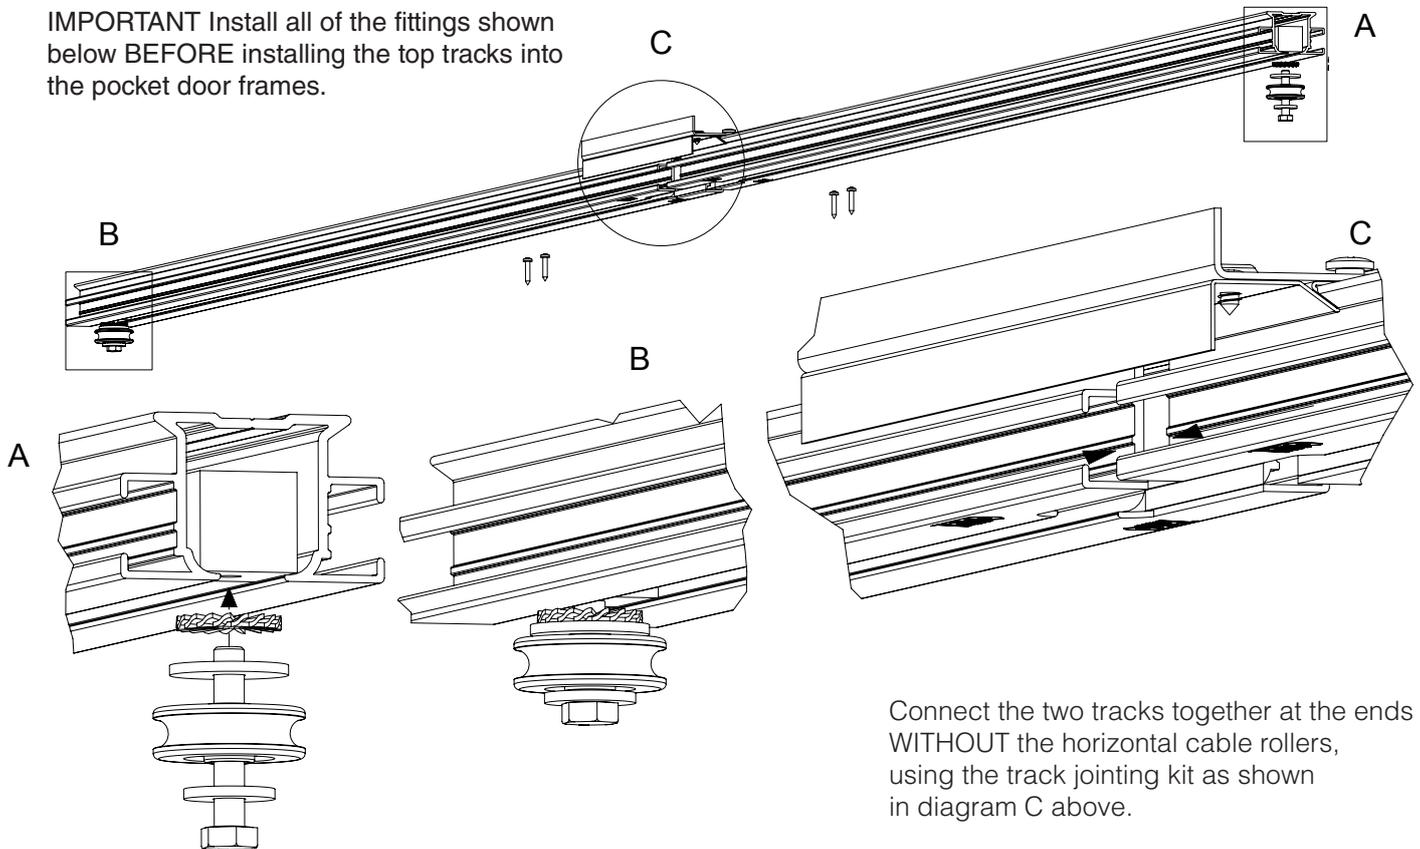


Connect the two tracks together at the ends **WITHOUT** the horizontal cable rollers, using the track jointing kit as shown in diagram C above.

Firstly install the horizontal cable rollers into the ends of each of the top tracks as shown in diagrams A & B above.




FITTING INSTRUCTIONS

Next attach the cable to the centre cable brackets (at this stage not fixed to the doors) and around the horizontal cable rollers as per the five stages shown below. Once installed the cable should be tight and when viewed from below should look like the below diagram. I.e) a tight oval shape.

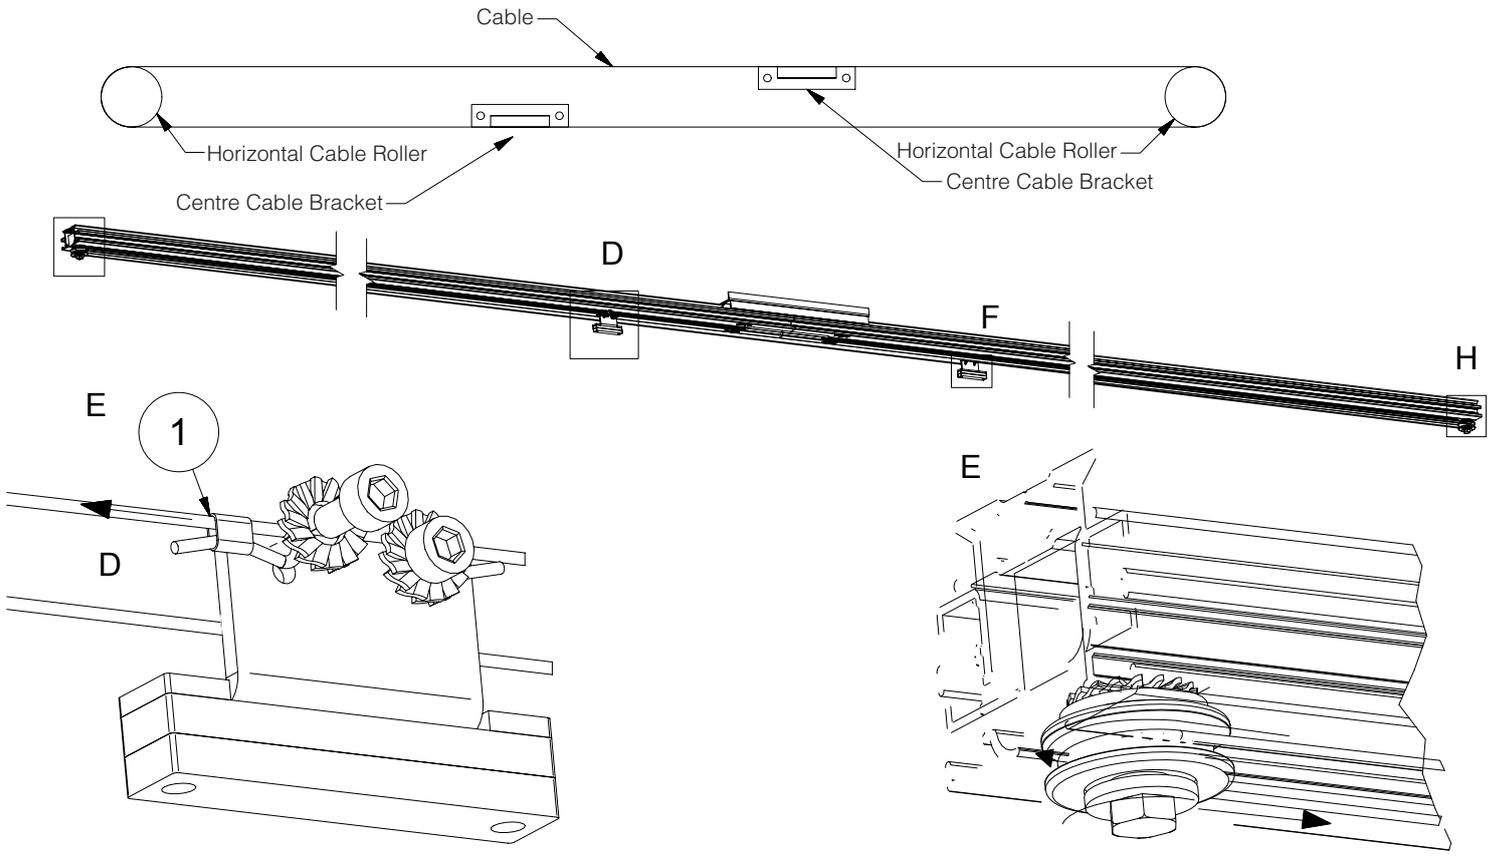

1. Take the first centre cable bracket and fix one end of the cable to the left hand fixing bolt / lock washer as shown in diagram D.

2. Feed the cable around the left hand horizontal cable roller as shown in diagram E.

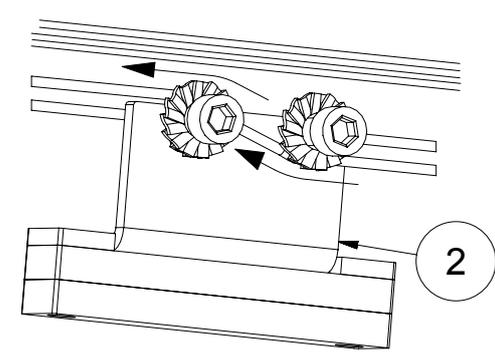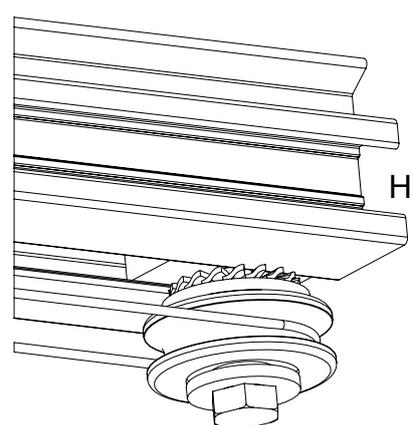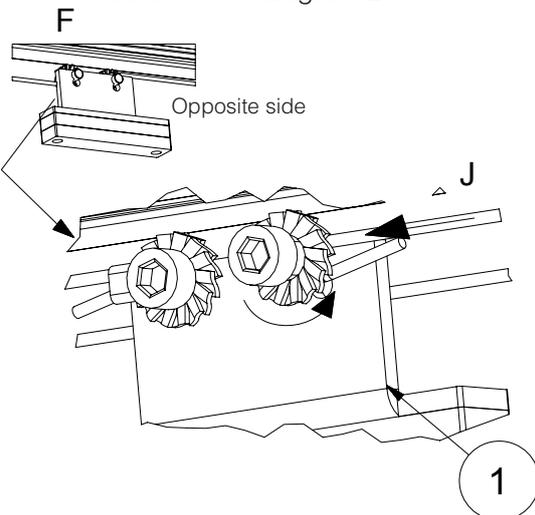

5. Cut the cable to the required length such as to achieve the tight oval shape, detailed and described at the top of page 2. Then fix this end of the cable to the right hand fixing bolt / lock washer on the first centre cable bracket as shown in diagram J.


4. Feed the cable around the right hand horizontal cable roller as shown in diagram H.

3. Feed the cable through the second centre cable bracket as shown in diagram F. The cable needs to be fed through both fixing bolts / lock washers and secured as shown, forming an elongated "S" shape.

Once all of the installation stages have been carried out as above, install the now double track (joined) into the two pocket door frames, in accordance with the standard single door fitting instructions.


Now install the complete two door pocket door set into the opening in the stud wall partitioning.

FITTING INSTRUCTIONS

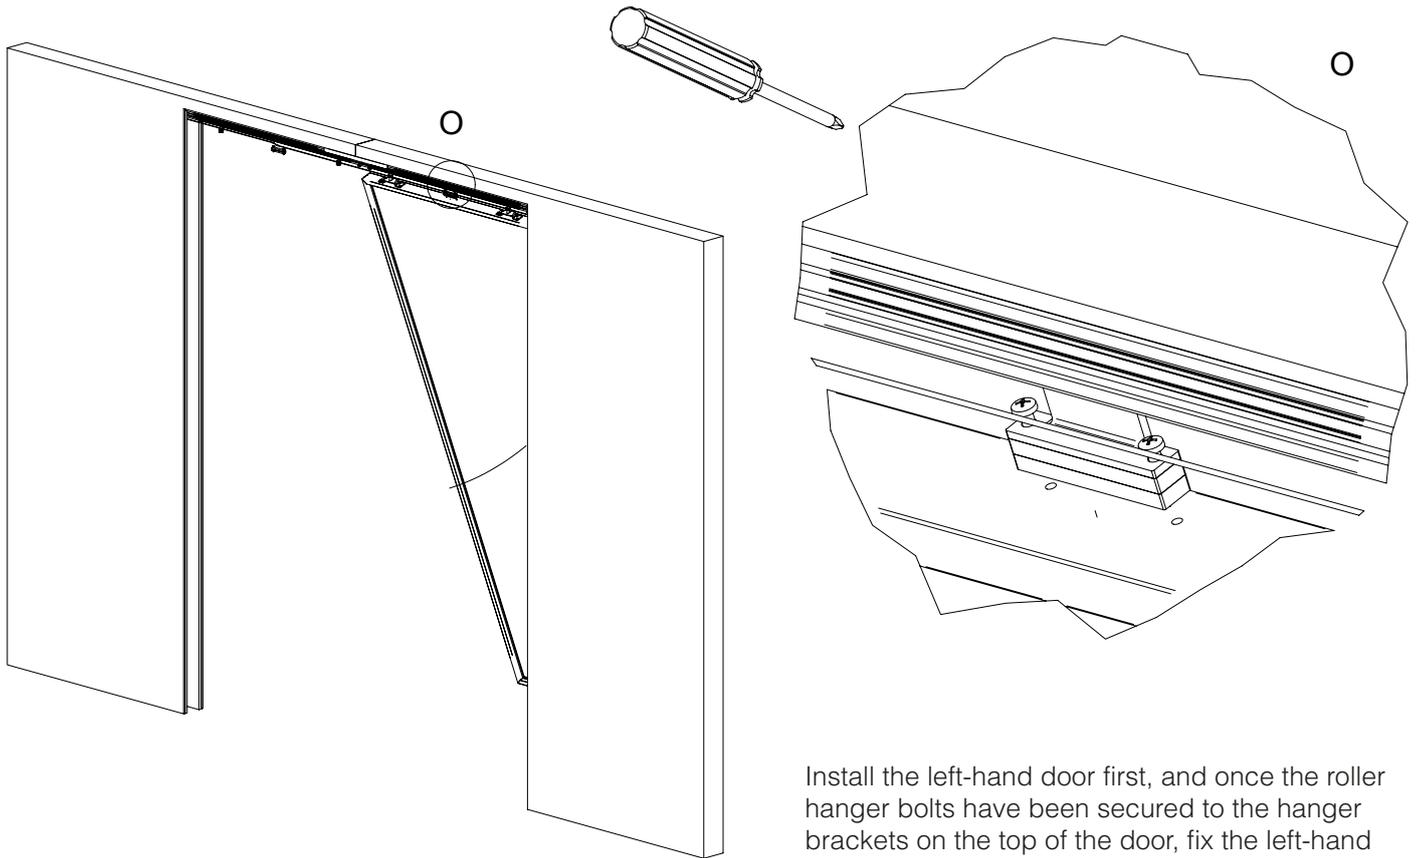

Now the doors can be installed into the pocket door assembly. This should be done in accordance with the standard single door fitting instructions with the door being offered up at a 45-degree angle as shown above. The hanger brackets already installed on the top of the doors are inserted over the roller hanger bolts which are already installed into the top track, again as shown in the standard single door fitting instructions.

Install the left-hand door first, and once the roller hanger bolts have been secured to the hanger brackets on the top of the door, fix the left-hand centre cable bracket to the middle of the top edge of the door, in the pre-marked position. (see page 1).

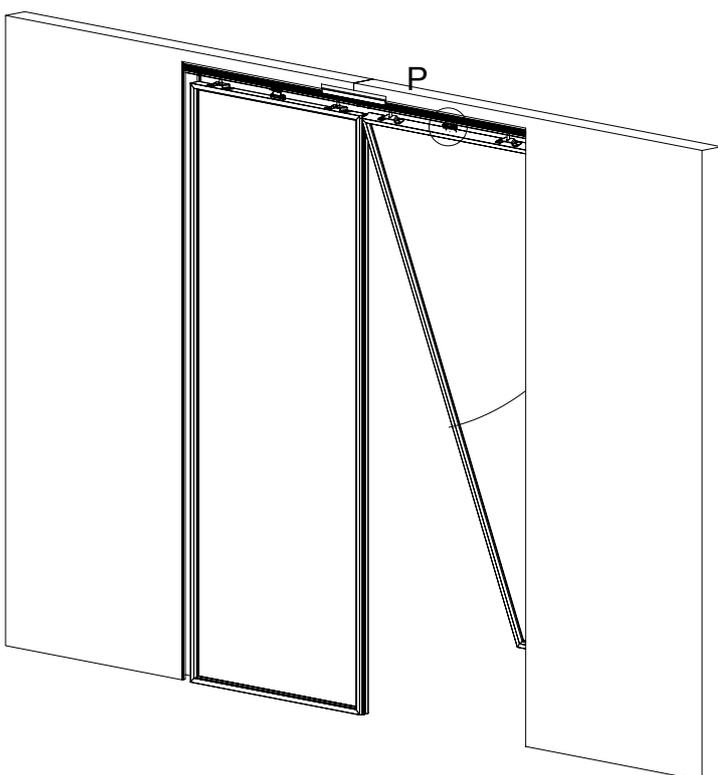

Repeat the process for the right-hand door.